


# DRILL COMBINATION **SOLITAIR DT**



## CONTENTS

<b>Technology</b>	<b>4</b>
Highlights	4
Tool combination	6
Skimmers and coulters	8
Compact discs harrow Heliodor	10
Tank	12
Metering and reconsolidation	14
Coulter bar OptiDisc	16
<b>Options</b>	<b>18</b>
Fertiliser unit	18
Further options	20
<b>iQblue</b>	<b>22</b>
General	22
Control	24
<b>Transport and lighting</b>	<b>26</b>
<b>Technical Specifications</b>	<b>28</b>
<b>Service</b>	<b>30</b>

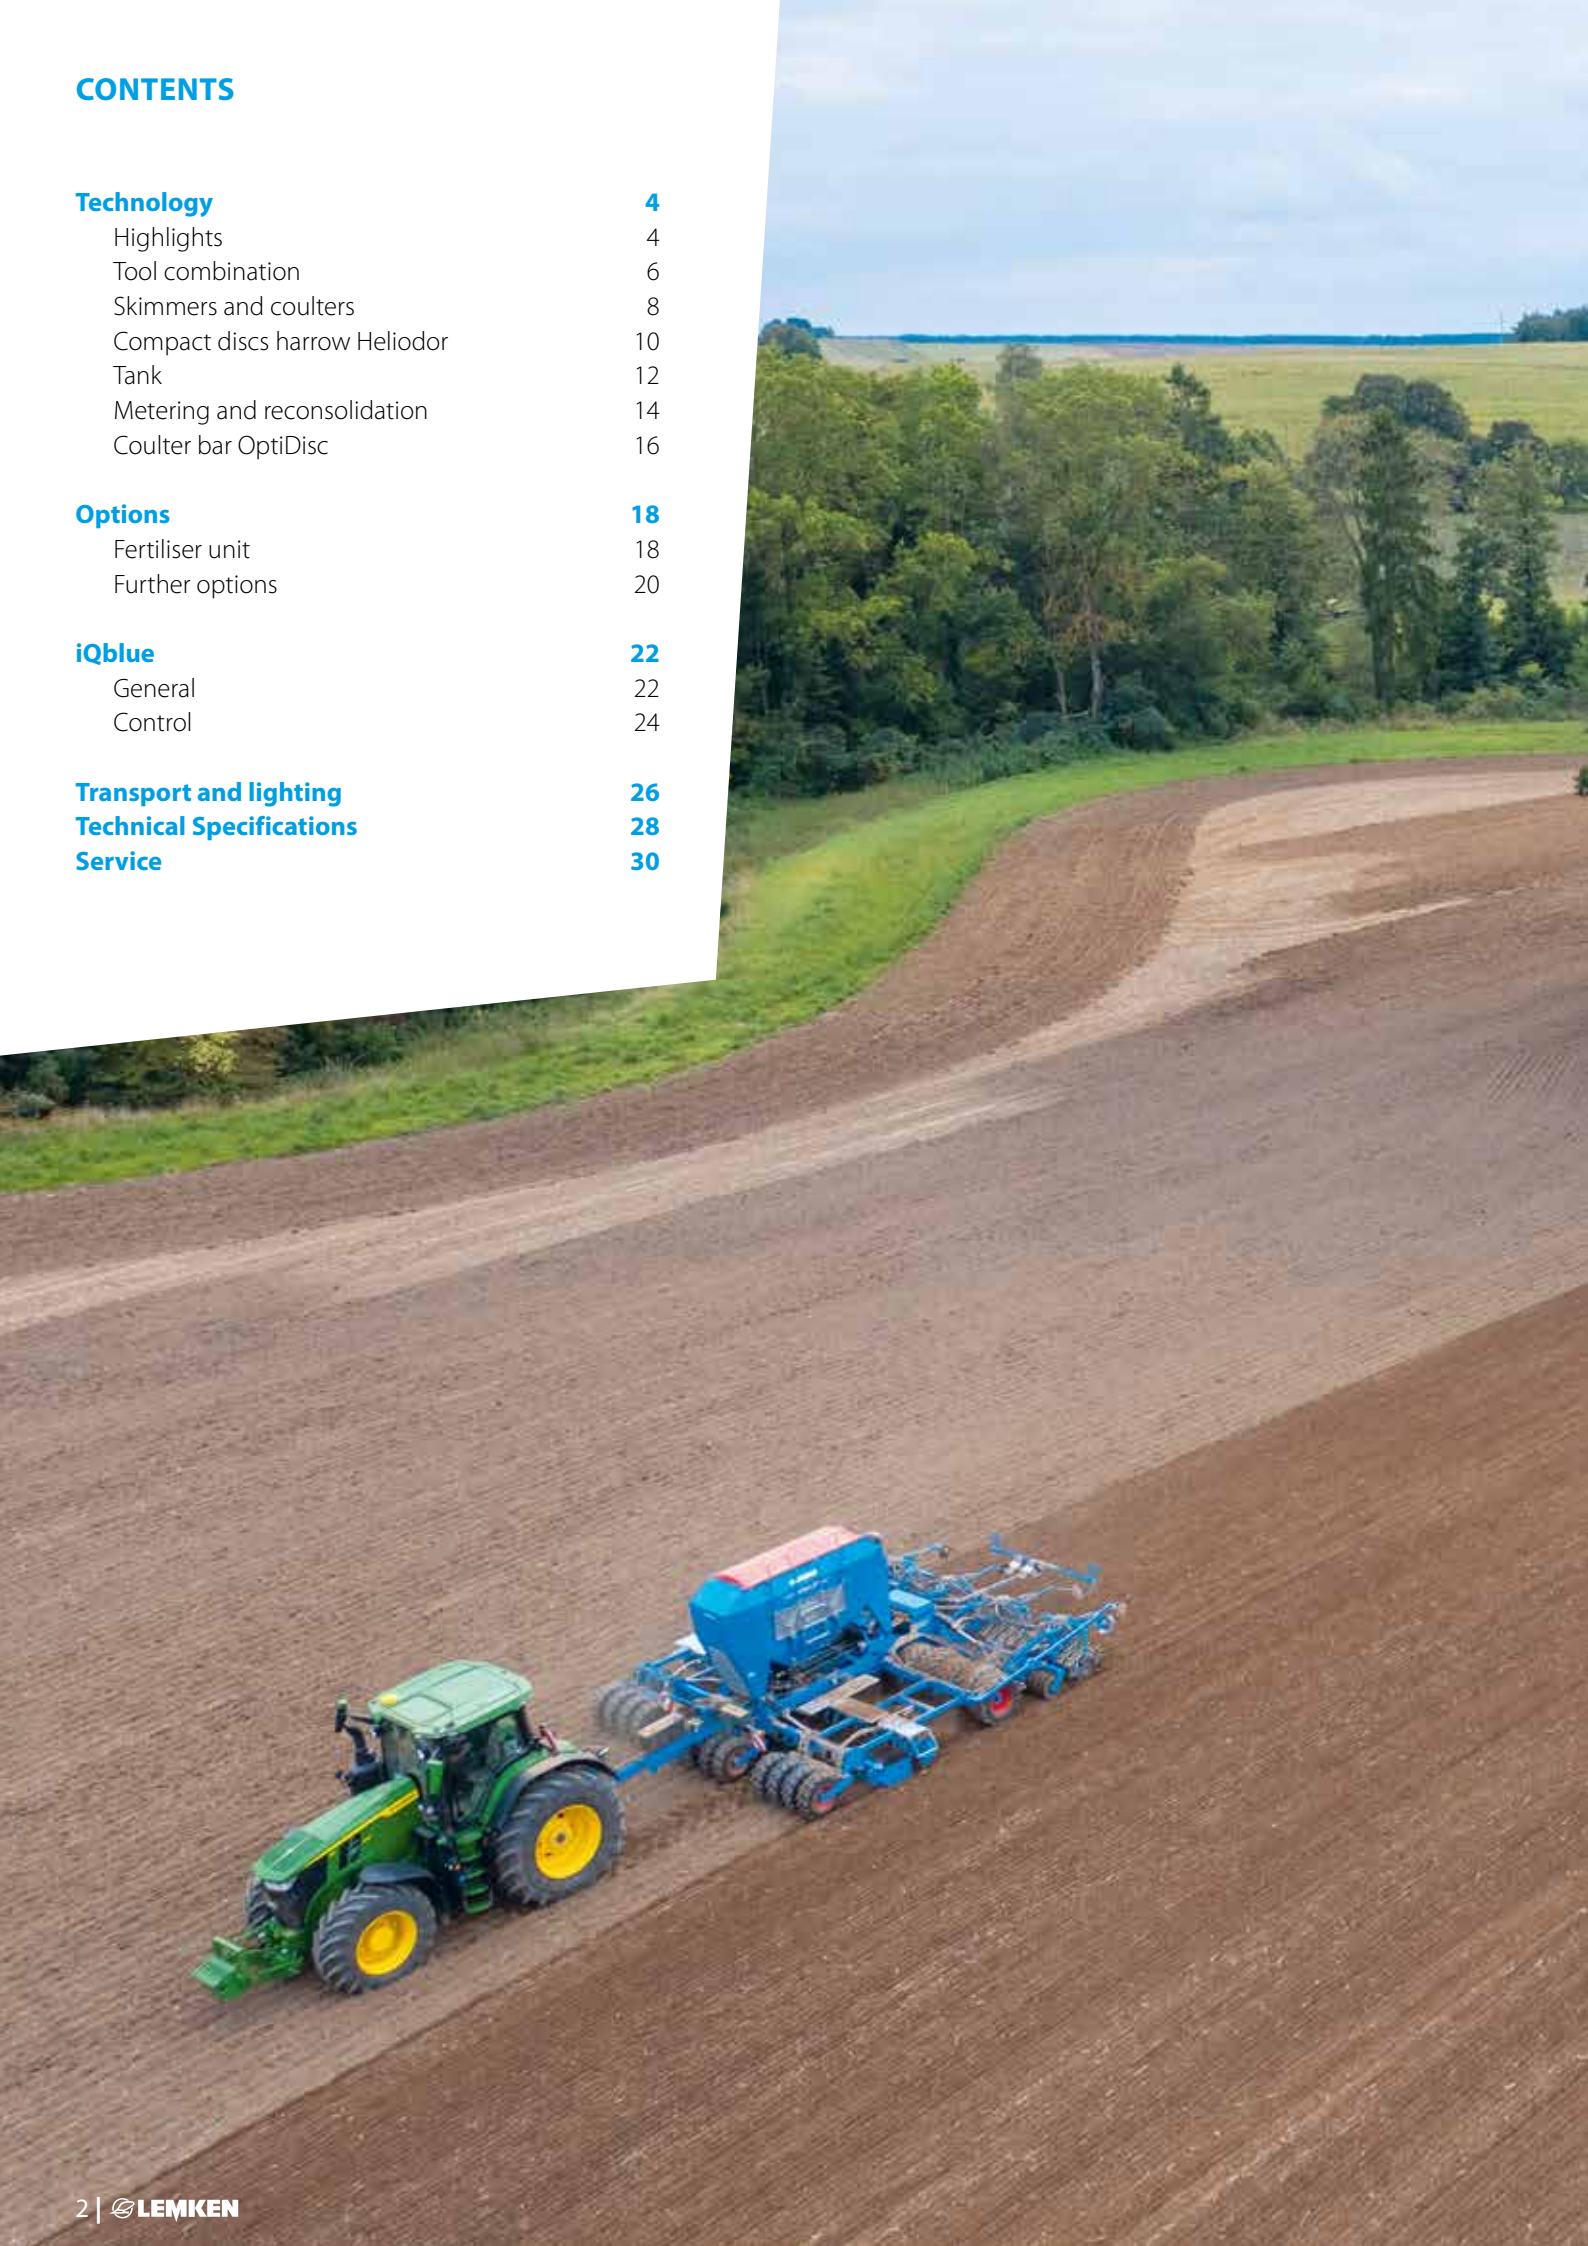

An aerial photograph of a vast agricultural landscape. The foreground is dominated by a large, dark brown, tilled field with visible furrows. To the left, a large, leafy green tree stands on a small patch of grass. The middle ground shows a mix of green fields and scattered trees. In the distance, a line of trees marks the horizon under a cloudy sky. A bright blue trapezoidal shape is overlaid on the right side of the image, containing white text.

OUR DRIVING FORCE:  
**YOUR SUCCESS!**

## **SOLITAIR DT** EFFICIENT AND LIGHT-WEIGHT

Greatest possible efficiency with maximum precision – these were the maxims set for designing the **Solitair DT**. The result is a drill combination with truly impressive performance: **lighter, more efficient, better.**


# HIGHLIGHTS SOLITAIR DT





**Roller tarp or pressure-resistant lid**  
for easy filling



**Levelling tines or front tyre packer (optional)**  
for reliable levelling or optimal reconsolidation

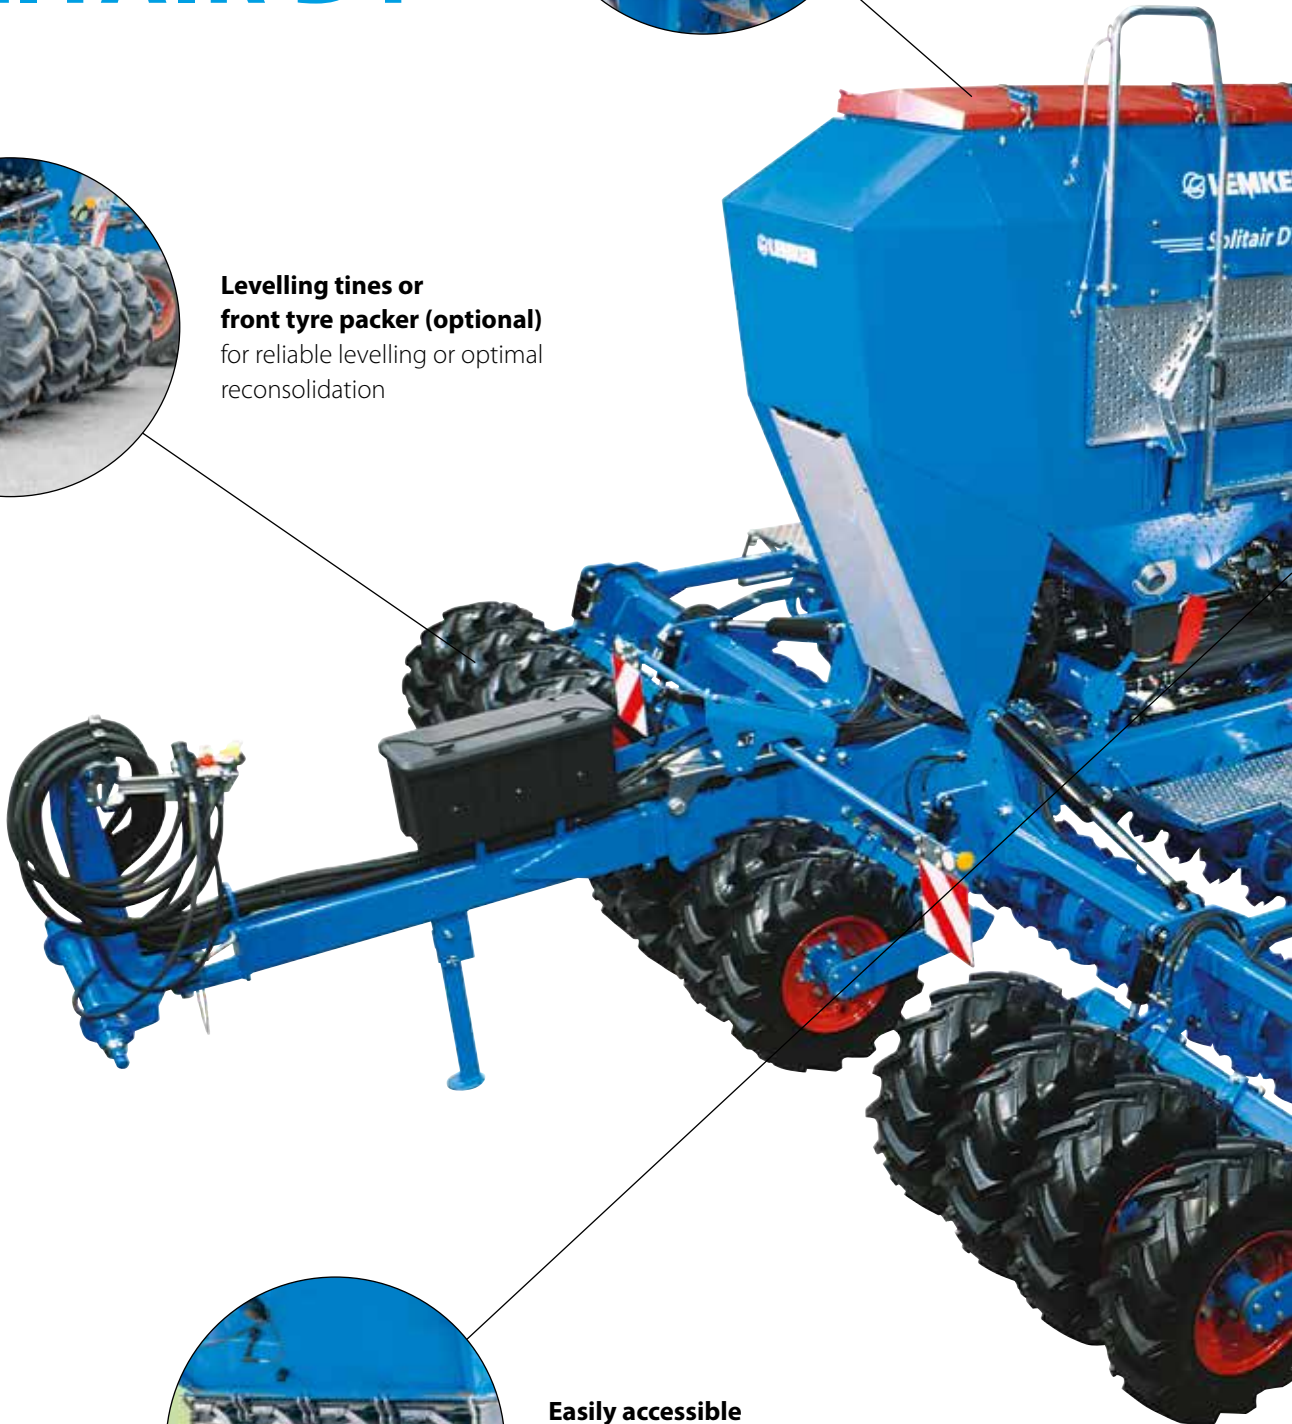

**Easily accessible metering system**  
for convenient calibration and fast metering roller changes

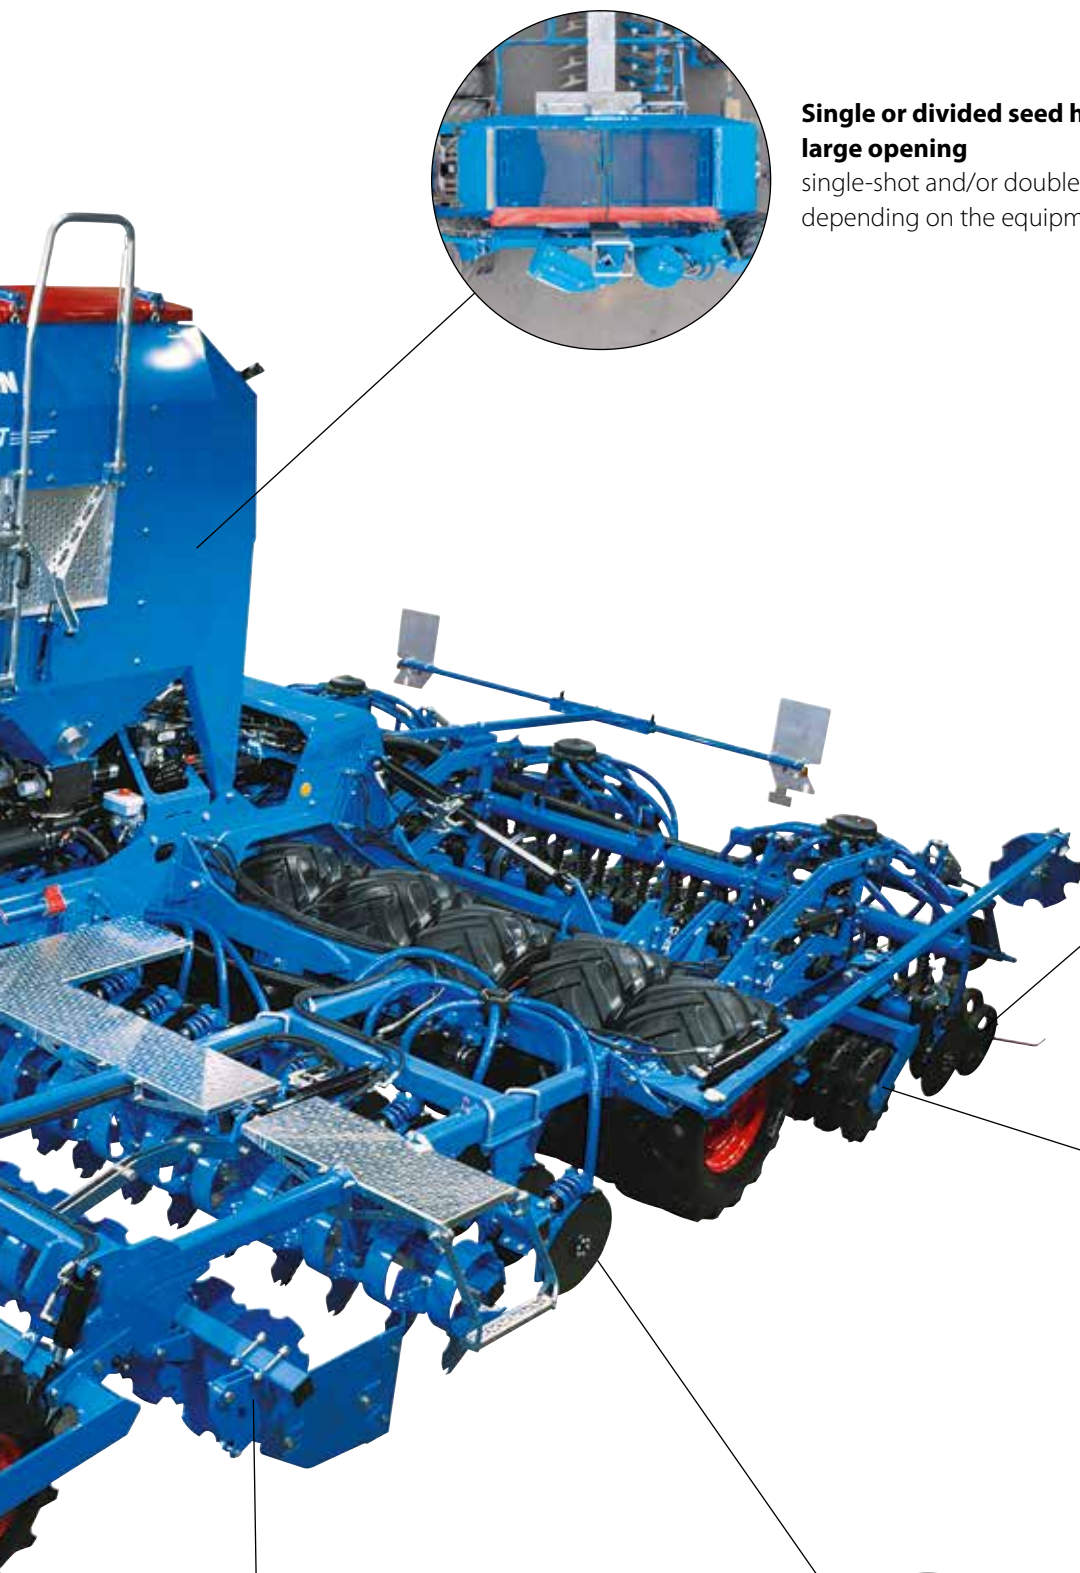

**Single or divided seed hopper with a large opening**

single-shot and/or double-shot placement depending on the equipment option


**Parallelogram-guided double disc coulters**

for precise seed placement and even field emergence




**Leading implements (optional)**

for targeted row pre-compaction or levelling ahead of the coulters bar

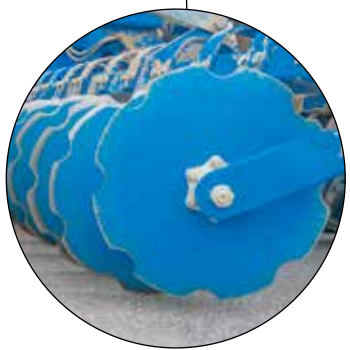

**Hydraulically adjustable disc section**

with corrugated or concave discs, depending on the desired intensity



**Coulter bar (optional)**

for fertiliser or a second type of seeds

# WELL THOUGHT-OUT TOOL COMBINATION PERFECTLY COORDINATED

## Reliable levelling

The wheelmark eradicator tools remove the tractor wheelmarks. The optional leading tyre packer additionally produces crumbled soil ahead of the disc section. The tyre packer can be replaced by a levelling tine section to level the ground evenly.

## Optimal seedbed preparation

The integrated **Heliodor** compact disc harrow leaves an evenly loosened, finely crumbly, level seedbed. Corrugated discs are optionally available for less intensive seedbed preparation.



### **Precise fertiliser placement**

The fertiliser coulters bar can be attached in front of the tyre packer roller on request. Fertiliser is precisely placed at the desired depth between two rows of seeds with up to 150 kg share pressure via the double disc coulters.

### **Optimal reconsolidation**


The tyre packer roller not only serves a transport function but also ensures that the entire seedbed is reconsolidated evenly. A trapeze packer roller can be optionally used for row preconsolidation.

### **Precise seeding**

The maintenance-free parallelogram-guided double disc coulters with trailing depth control roller in the **OptiDisc** coulters bar guarantees precise seed placement and even coverage height. This creates optimal conditions for even field emergence – even at high forward speeds.



# PREPARATION IS EVERYTHING

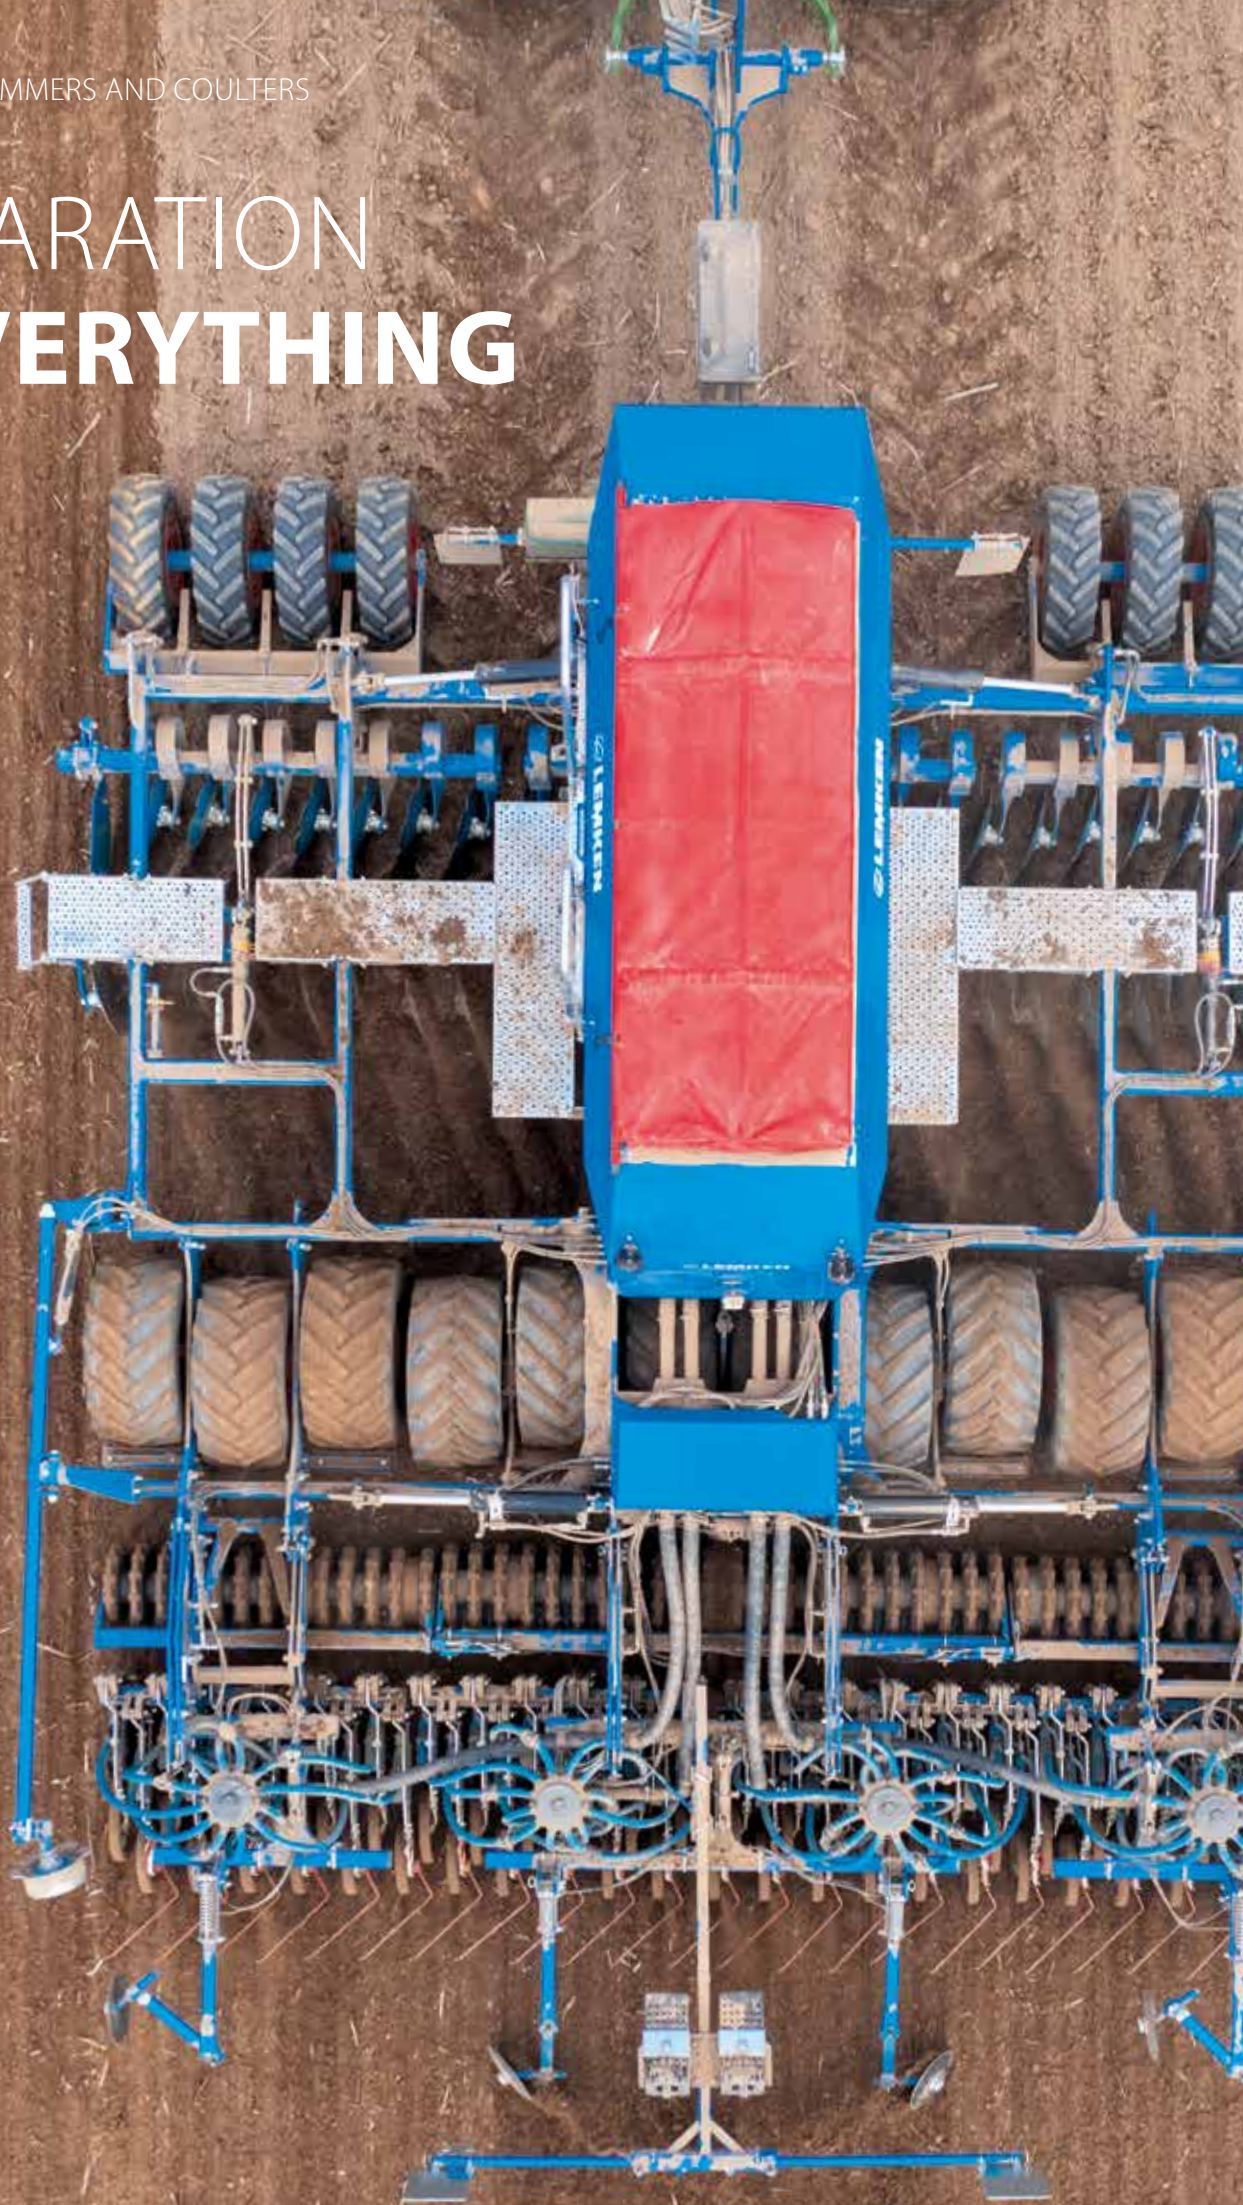





### **Wheelmark eradicator discs**

Can be optimally adjusted to the tyre width and penetration depth, regardless of the working depth of the Heliodor section. The **IQ drill** control with integrated headland management takes care of the raising and lowering processes at the headland.



### **Leading tyre packer roller**

For crumbling and levelling the seedbed and for reconsolidation ahead of the disc section.



### **Spring-mounted levelling tines**

Reliably level any unevenness when used on ploughed land and can be easily adjusted from the tractor seat. For the best possible work results, the levelling tines can be used in grade or drag position.



# ALWAYS THE RIGHT OPTION



### **Serrated concave discs**

With a diameter of 465 mm and a thickness of 5 mm, these ensure good penetration into the soil, even in the most difficult conditions.



### **Low-draft corrugated discs**

For less intensive soil mixing, the 22-mm corrugated discs have a waveform shape. These discs are particularly suitable where the germination of weeds is to be suppressed. In dry regions, corrugated discs allow water-saving seedbed preparation because only the area in front of the seeding coulters is loosened. The use of corrugated discs reduces tractive force requirements even further.



### **Maintenance-free disc bearing**

The high-quality axial angular ball bearings ensure lasting, flawless function of the discs. The bearings are completely encapsulated so that no dirt can penetrate.




## Precise depth control

Each disc is individually attached to the frame via leaf springs for precise depth control. Unlike commonly used rubber buffers, leaf springs guarantee that the discs have significantly higher track stability during operation. Optionally, these are also available with hydraulic adjustment.



# CONVENIENT FILLING



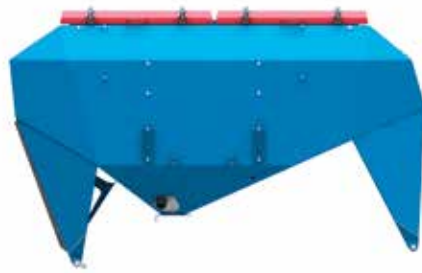


Tank volume 3,400 litres  
Single tank, 4 metres width



Tank volume 4,400 litres  
Single tank, 6 metres width



Tank volume 4,100 litres  
Divided tank, 4 metres width

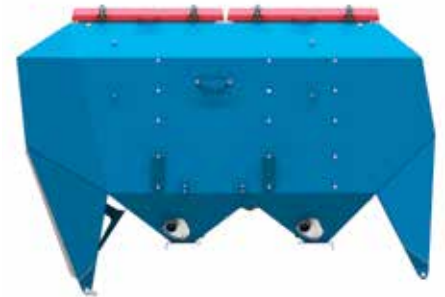

Tank volume 5,100 litres  
Divided tank, 6 metres width

Whether straight from a big bag or from a front loader bucket – filling the **Solitair DT** is as straightforward as it gets. Never lose even a single grain or granule again!

# PRECISE METERING



### Very good ergonomic access

Whether for calibration testing, adjustment or cleaning – the corrosion-resistant metering system is easily accessible



### One metering system per distributor

This allows width section control even in the basic version. Automatic width section control is optionally available



### Speed signal

The speed signal for metering can be from either a radar sensor on the drawbar or the speed signal of the tractor.

### Metering

100% fertiliser-compatible

### Tool-free seed wheel change

for fast switching between different seeds



# PREPARES THE BED FOR YOUR SEEDS



## **Reconsolidation over the full width**

The generously dimensioned tyre packer roller with a 90-cm diameter ensures even reconsolidation across the full seedbed. The staggered arrangement of the individual wheels additionally leads to better self-cleaning and ensures good sowing, even in wet conditions.



## **Optimal levelling**

With an additional harrow between the tyre packer roller and the seeding coulters, the seedbed can be optimally levelled.



## **Preconsolidation of seed rows**

As an alternative to a harrow, a trapeze packer roller (420 mm diameter) can be added to the **Solitair DT** to obtain a defined pre-consolidation of rows directly in front of the **OptiDisc** double disc coulters. The roller improves both the smooth operation of the seeding coulters and the soil contact of seeds.

# THE RIGHT PLACEMENT

## A well thought-out coultter system

The **Solitair DT** is equipped with the maintenance-free **OptiDisc** coultter bar. This bar boasts parallelogram-controlled double disc coultters and trailing depth control rollers.

Seeds are pressed into the soil by the depth control roller to ensure even, rapid field emergence. Both coultter pressure and seed depth can be adjusted independently of each other. This ensures that seeds are always placed at exactly the same depth, even at high forward speeds and in changing soils.

The coultter system is available in a hydraulic version (up to 70 kg coultter pressure) and a mechanical version (up to 45 kg coultter pressure). The row spacing is optionally 12.5 cm or 16.7 cm.







Distributor in sowing mode



Distributor with switched tramlines

### Individual tramline creation


Four distribution heads positioned directly above the coulter bar ensure superior transverse distribution.

An integrated hydraulic tramline mechanism is optionally available for the **OptiDisc**. The symmetrical distribution of the seed tubes in tramline mode ensures that no seeds need to be returned. The seed rate is automatically reduced when the tramline is switched. The easy exchange of the distributor cartridges enables quick adaptation to a wide variety of tramline systems. This increases flexibility – especially when working across farms.

# A BETTER START FOR YOUR CROPS

The **Solitair DT** can be used for seeding with fertilisation or for sowing different seeds. Two variants are available: In the single-shot version (1), the fertiliser and seeds or two types of seeds are placed in a shared seed furrow, whereas the double-shot version (2) places the fertiliser or second type of seeds in a line below the seedbed via separate double disc coulters.

## 1. Single-Shot

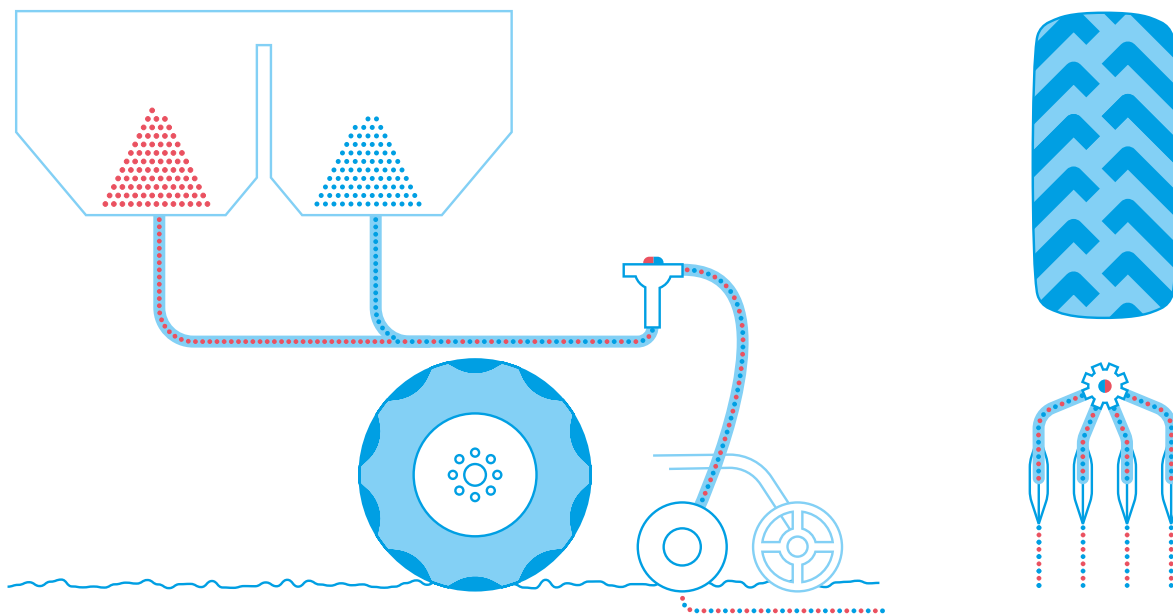


### Two components, one seed furrow

The single-shot variant allows two different components to be applied via a single seeding coulter in the OptiDisc coulters bar. This is particularly useful when fertilising and drilling at the same time. When sowing catch crop mixtures with large differences in grain size distribution, it is also advisable to meter the larger

components separately from the smaller components and mix them only just ahead of the distributor. This prevents the seeds from separating in the seed hopper so that nothing stands in the way of uniform seed distribution.

## 2. Double-Shot

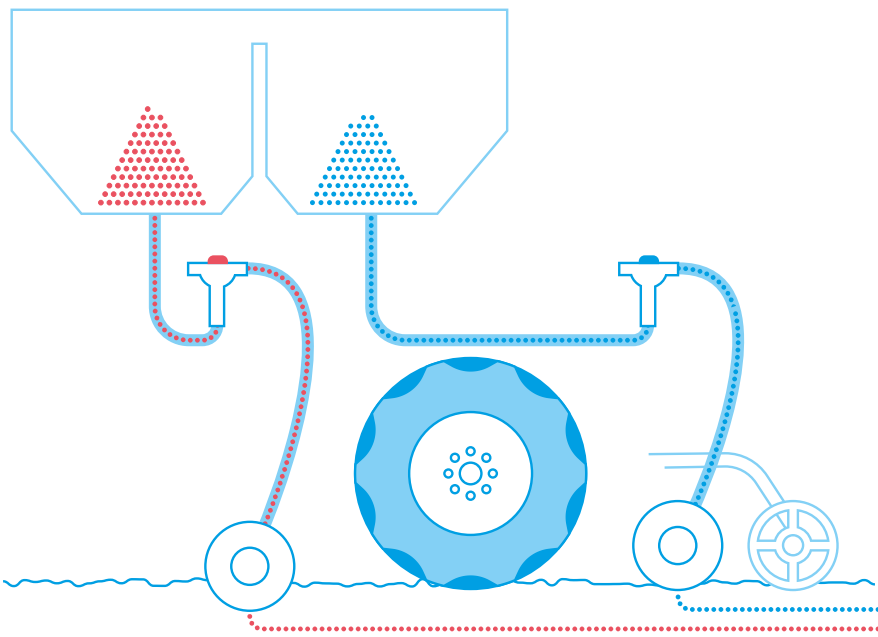

### Fertiliser coulters bar with overload protection

The fertiliser coulters bar is located in front of the tyre packer roller. Fertiliser is precisely placed at the desired depth with up to 150 kg share pressure via the double disc coulters (400 mm diameter). The depth at which the fertiliser is placed is adjusted via clips on the hydraulic cylinder. When seeding without

under-root fertilisation, the fertiliser bar remains in the elevated position in order to protect the fertiliser coulters against wear.

# ADAPTED TO YOUR NEEDS



## **Harrow**

For good levelling and coverage of seeds, the levelling harrow and single harrow, which can be adjusted without tools, perfectly complement the double disc coulters.

The S levelling harrow is adjusted via a pin, which allows the harrow height and harrow pressure to be adjusted independently of each other. The harrow can additionally be fitted with hydraulic lifting to facilitate transport and precision cultivation. The single harrow reliably covers two seed rows and therefore adapts to a wide range of conditions.



## **Pre-emergence marker**

The **Solitair DT** is optionally available with a pre-emergence marker to mark the tramline as it is created. This marker is automatically lowered when a tramline is created.



## **Hydraulic track markers**

The hydraulic track markers are centrally located and always in the driver's field of vision.



### **Tank drainage**

The tank is conveniently drained via a drainage valve on the side of the machine.



### **Hydraulic fan**

The speed of the hydraulically driven fan is infinitely variable and is achieved even at low tractor engine speeds. The oil requirement is only 30 l/min. Variations in the tractor engine speed do not affect the speed of the fan to ensure the consistent, even delivery of seeds.



### **Long drawbar**

The Solitair DT features a long drawbar for maximum manoeuvrability when working with wide rear wheels or twin tyres. This allows a steering angle of up to 90 degrees, even with a maximum outside tractor width of 4 m.

# iQblue

## THE DIGITAL WORLD OF LEMKEN

**iQblue's** digital solutions make your field work more efficient and speed up your office work. This leaves you more time for everything you really enjoy!

The LEMKEN **iQblue** world offers you smart products that network machines and data efficiently.



### **iQblue connect**

The module that makes your implements smarter and more precise.



### **iQblue Clara Weather station**

The weather station that helps you make the right decisions.



### **Data management**

Manufacturer-independent systems to ensure that you see everything at a glance.



### **Assistance and control systems**

Smart solutions for effortless work and precise results.



### **Terminals**

The hardware for efficient machine control.



### **Joysticks**

Convenient operation for increased comfort.



### **LEMKEN Apps**

Mobile applications that make your life easier.

## **MORE TIME** FOR FARMING AND THE REALLY IMPORTANT THINGS IN LIFE!





# CONTROL CONCEPT IQ DRILL

IQ drill is the ISOBUS-based control concept for the **Solitair DT**. Thanks to the uniform LEMKEN design, drivers quickly find their way around.

## Separate MultiBoom section control

MultiBoom supports automatic, separate width section control for fertiliser and seeds. This prevents overlaps. It is also possible to work through two application maps in parallel, so that seeds and fertiliser are only applied where they can be used efficiently.

## Logical structure, intuitive operation

Using the layout manager, the user interfaces can be freely configured and saved in up to four driver profiles. The system is controlled either via a LEMKEN CCI-1200 terminal or via any universal ISOBUS terminal.

## Rapid assistance

The information menu gives access to various diagnostic options. The new diagnostics system guides operators directly to the source of any errors in case of disruptions and assists them in troubleshooting.







# NO MATTER THE TIME **ALWAYS A GOOD DRIVE**





The powerful lighting of the **Solitair DT** provides an optimal view for careful drilling even at night. Lighting is also optionally available for the metering area.

A giant in the field, safe and agile on the road. The tyres of the **Solitair DT** run without hydraulic counterpressure and therefore ensure stable handling in all road conditions and at speeds of up to 40 km/h.



## TECHNICAL SPECIFICATIONS **SOLITAIR DT**

Working width	4 m	6 m
Transport width	3 m	3 m
Transport height	3.57 m	3.57 m
Length	8.7 m	8.7 m
Axle load*	5,240 kg	7,540 kg
Drawbar load*	840 kg	1,375 kg
Total weight*	6,080 kg	8,915 kg
Seed hopper volume	3,400 l	4,400 l
Tank volume double tank	4,100 l (40:60)	5,100 l (40:60)
Filling opening single tank	2.23 × 0.8 m	2.23 × 0.8 m
Filling opening double tank	2 × 1.07 × 0.8 m	2 × 1.07 × 0.8 m
Filling height	2.95 m	3.2 m
Filling height double tank	2.95 m	3.2 m
Number of fertiliser coulters	16 / 12	24 / 18
Fertiliser coulters pressure	up to 150 kg max.	up to 150 kg max.
Row spacing	12.5 / 16.7 cm	12.5 / 16.7 cm
Number of seeding coulters	32 / 24	48 / 36
OptiDisc M coulters pressure	up to 45 kg	up to 45 kg
OptiDisc H coulters pressure	up to 70 kg	up to 70 kg
Tyre packer diameter	90 cm	90 cm
Power requirement	from 160 kW / hp	from 200 kW / hp
DA spool valves	min. 2	min. 2
Unpressurised return line (max. 5 bar)	1	1
Oil volume hydr. fan	approx. 30 l/min	approx. 30 l/min
Lower link implement attachment	Cat. 3/4	Cat. 3/4
Drawbar implement attachment	Pin 40–50 mm diam.	Pin 40–50 mm diam.
Ball head implement attachment	K 80	K 80

\* Weights may vary depending on equipment

# WE'RE HERE FOR YOU

## **Providing a professional all-round service**

On-demand assistance. All around the world. That's our LEMKEN Service. The LEMKEN team provides professional advice as well as a speedy supply of machinery and parts via: 18 convenient branches and external ware-

houses in Germany, our own sales companies and importers in over 50 countries, and of course a great many highly qualified sales advisers and service technicians at specialist agricultural machinery dealers.





### **Supplying high-quality original wear parts**

Our LEMKEN original wear parts enable your LEMKEN implement to stay as it is: an original. Whichever machine you need a spare part for, we ensure that the original parts are always available for all LEMKEN implements. Not only in the short term, but for years to come.

### **Delivering spare parts speedily**

The right parts at the right time in the right place — this is how a reliable replacement parts service should operate. Our professional logistics handling service ensures we can supply a wide range of replacement parts at speed, whenever and wherever they are needed.

**“Your eyes glance over the level seedbed. A new crop. Row after row. The end goal in sight. Foundations for a rich harvest. Success sown in record time.”**

When it comes to sowing, and therefore your harvest, pull out all the stops. LEMKEN drilling technology enables you to use both conventional and conservative tillage methods and rest assured that our seed drills will always meet your requirements. Why? Because: Our driving force: Your success!



LEMKEN GmbH & Co. KG  
Weseler Strasse 5  
46519 Alpen, Germany  
Tel. +49 2802 81-0  
Fax +49 2802 81-220  
info@lemken.com  
www.lemken.com

FIND OUT MORE  
ABOUT OUR PRIVACY  
REGULATIONS  
WHEN HANDING OVER  
MACHINES HERE



Your specialist LEMKEN dealer: